


Data Sheet

SRM-5A

Short-Range Async Modem



- Asynchronous transmission rate of up to 19.2 kbps
- Transmission range (max): 12 km (7.5 miles)
- No AC power required
- Transformer isolated
- V.24/RS-232-C interface
- Compact, lightweight, easy to install
- DCE/DTE switch
- Internal filter protection against conducted or radiated noise
- Two line connectors: terminal block plus RJ-45 or RJ-11 connector

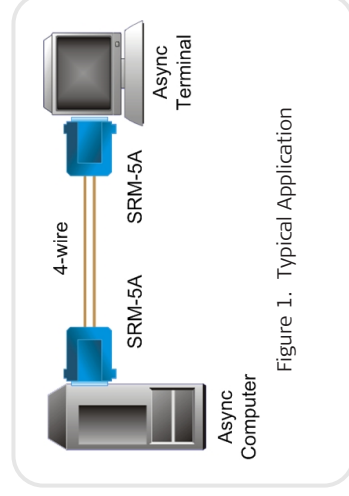


Figure 1. Typical Application

SRM-5A is a miniature asynchronous short-range modem for local data distribution, connecting full-duplex asynchronous DTEs to computers.

SRM-5A operates at distances of up to 12 km (7.5 miles), depending on the wire gauge and data rate (see *Table 1*). The modem ensures integrity of data transmission, using unconditioned 4-wire dedicated lines at data rates up to 19.2 kbps. An internal filter overcomes both radiated and conducted noise, and provides surge protection.

The modem operates without connection to the mains supply, by using ultra low power from the V.24/RS-232 data and control signals. The modem will operate even if only transmit data is connected, i.e. without any control signals. Both positive and negative signals are generated, irrespective of constantly high or constantly low transmit data.

The low transmit level minimizes crosstalk onto adjacent circuits within the same cable. Data is transmitted and received at a balanced interface, ensuring high immunity to circuit noise.

SRM-5A features a switch-selectable DCE/DTE option. This allows the modems to operate as DTE for connection to a DCE (such as a multiplexer port) without the need for a cross-cable.

SRM-5A is coupled to the dedicated line via isolation transformers rated at over 1,500 VRMS. The transformers, together with other circuitry, protect against AC or DC overvoltages. This makes SRM-5A suitable for connection to local circuits provided by most national telephone administrations (P.T.T.s).

Two connectors are provided for the line interface: a five-screw terminal block, and either an RJ-45 or RJ-11 connector (see *Ordering*).

**Note:** Pins 1 and 6 are grounded on the RJ-11 connector.

Table 1. Approximate Range

Data Rate kbps	19 AWG (0.9 mm)		24 AWG (0.5 mm)		26 AWG (0.4 mm)	
	km	miles	km	miles	km	miles
19.2	5.0	3.0	2.0	1.0	1.5	1.0
9.6	10.0	6.0	4.5	2.5	3.0	2.0
4.8	11.5	7.0	5.0	3.0	4.0	2.5
2.4	12.0	7.5	5.5	3.5	4.0	2.5
1.2	12.0	7.5	5.5	3.5	4.0	2.5

## Specifications

### Data Rate

Up to 19.2 kbps

### Transmission Line

4-wire, unconditioned dedicated line  
(two twisted pairs)

### Transmission Mode

Asynchronous, full-duplex

### Transmission Controls

**DSR** (Circuit 107) turns on immediately after the  
DTE raises DTR (Circuit 108/2)

**CTS** (Circuit 106) and **DCD** (Circuit 109) turn on  
immediately after the DTE raises RTS  
(Circuit 105)

### Transmission Level

0 dBm

### Transmission Range

Up to 12.0 km (7.5 miles)  
(See *Table 1*)

### Digital Interface

V.24/ RS-232 25-pin, male or female integral  
connector

### Line Interface

5-screw terminal block and either an  
RJ-45 or an RJ-11 socket

**Power**

None required; uses ultra-low power from the V.24/RS-232 data and control signals

**Physical**

Length: 52 mm (2.1 in)

Width: 53 mm (2.1 in)

Height: 18 mm (0.7 in)

Weight: 42 g (1.5 oz)

**Environment**

Temperature: 0°-50°C (32°-122°F)

Humidity: up to 90%, non-condensing

**Safety**

The exclamation point within an equilateral triangle alerts the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

All connections should only be performed by a skilled technician who is aware of the hazards involved. The digital interface of the SRM-5A must be connected to equipment that is connected to protective earth at all times, or to equipment that has double or reinforced insulation between the mains and the protective earth.

**DECLARATION OF CONFORMITY**

**Mfr. Name:** RAD Data Communications Ltd.  
**Mfr. Address:** 24 Raoul Wallenberg St.  
Tel Aviv 69719, Israel

declares that the product:

**Product Name: SRM-5A**

Conforms to the following standard(s) or other normative document(s):

**EMC:** EN 55022:2006 + A1:2007

EN 55024:1998 + A1:2001 + A2:2003

EN61000-3-2:2000 + A2:2005

EN61000-3-3:1995 + A1:2001

**Safety:** EN 60950-1:2005

**Supplementary information:**

The products herewith comply with the requirements of the Low Voltage Directive 2006/96EC and R&TTE Directive 99/5/EC for wired equipment. The products were tested in a typical configuration.

Tel Aviv, 15 August 2009



Haim Karshen  
Quality Manager

European Contact: RAD Data Communications  
GmbH, Otto-Hahn-Str. 28-30, 85521  
Ottobrunn-Riemerling, Germany

## Installation

**Caution.** When setting the jumpers or performing any actions inside the open product, be careful not to bend or break any components.

### Installing the modem:

1. Set the DCE/DTE switch to the position required by the application (the factory setting is DCE).

### Connecting the line to a terminal block:

- a. Connect the 4-wire dedicated line to the line connector; transmit pair to XMT and receive pair to RCV.

## Caution

*To reduce the risk of fire, use only No. 26 AWG or larger telecommunication line cords.*

## Attention

*Pour réduire les risques d'incendie, utiliser seulement des conducteurs de télécommunications 26 AWG ou de section supérieure.*

- b. Verify that the pin polarity between the local modem and the remote modem is as follows:
  - Local +XMT connects to remote +RCV
  - Local -XMT connects to remote -RCV
  - Local +RCV connects to remote +XMT
  - Local -RCV connects to remote -XMT(see *Figure 1*).

### Connecting the line to an RJ-11 or RJ-45 connector:

- a. Verify that the cable matches the polarity detailed in the pin assignment figures.



- b. Plug the cable into the RJ socket (see *Figure 2* and *Figure 3*).
- 2. Connect the modem directly to the 25-pin connector of the DTE or computer and fasten the modem with the screws on each side of the connector.

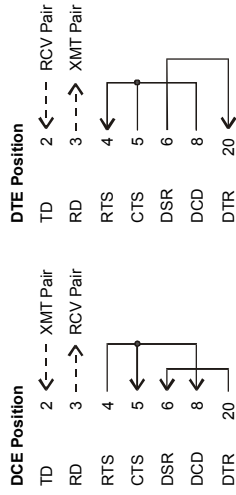


Figure 1. DCE/DTE Switch Configuration

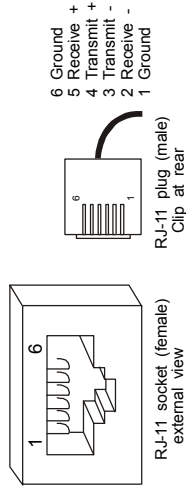


Figure 2. RJ-11 Pin Assignment

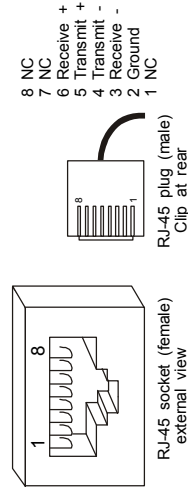


Figure 3. RJ-45 Pin Assignment

## Ordering

SRM-5A/\*/+NEW

*Legend*

- \* Digital interface connector type:
  - F female 25-pin
  - M male 25-pin
- + Line interface connectors:
  - RJ-11 RJ-11
  - RJ-45 RJ-45

110-100-09/09 Specifications are subject to change without prior notice. © 1988-2009 RAD Data Communications Ltd. The RAD name, logo, logotype, and the terms EtherAccess, TDMoIP and TDMoIP Driven, and the product names Optimux and IPmux, are registered trademarks of RAD Data Communications Ltd. All other trademarks are the property of their respective holders.

### International Headquarters

24 Raoul Wallenberg Street  
Tel Aviv 69719, Israel  
Tel. 972-3-6458181  
Fax 972-3-6498250, 647 4436  
E-mail [market@rad.com](mailto:market@rad.com)

### North America Headquarters

900 Corporate Drive  
Mahwah, NJ 07430, USA  
Tel. 201-5291100  
Toll free 1-800-4447234  
Fax 201-5295777  
E-mail [market@rad.com](mailto:market@rad.com)

Order this publication by Catalog  
No. 800674



**data communications**  
The Access Company